

Normal Care

Drip stands for the day-to-day patient care

P. 54



Intensive Care

Premium IV-Poles for use in ICU

P. 60



OR

IV-Poles with welded bases specifically for use in OR

P. 66



MRI

MRI-approved IV-Stands for use in Magnetic Resonance Surroundings

P. 70



Urology

Specific IV-Poles for the Urology Department


P. 72



Paediatric

Child-friendly IV-Poles

P. 74

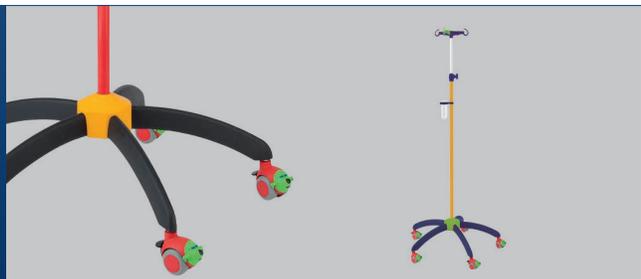



Homecare

P.76

Portable IV-Stands for privat use or Homecare



Accessories

P. 80

For all IV-Pole series



IV-Poles

P. 86


IV-Poles linked to beds, OR-tables and wheelchairs



Hygiene Centre

P. 88

Providing hygiene mobile and on site

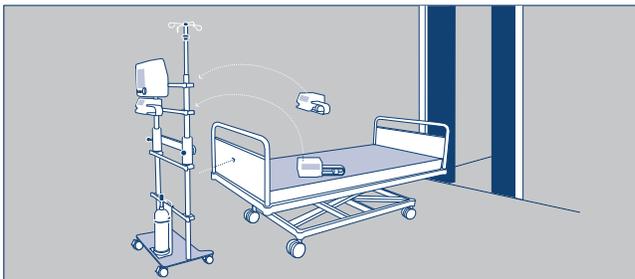

Mobile Transfer Cart

P. 92

Intra-clinical transport – professionally solved



Care Furniture

P. 98

Multipurpose furniture for doctor's practice and clinics

OEM solutions: solutions for the medical industry from page 102 pp.

Normal Care

IV Stand / Drip Stand



examples for the
2 optional height
adjustments

I-N41221

(our recommendation for use on general wards)

+ patented sealing cap prevents contamination

Material	chromed steel
Colour of plastic parts	blue
Bottle holder	plastic 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	screw height adjustment
Regulating range	appr. 1.350 mm – 2.150 mm
Tube diameter	25 / 18 mm
Length of outer tube	1.000 mm
Base diameter	635 mm
Base leg profile	25 × 25 mm
Castors	twin castors Ø 50 mm, according to DIN EN 60601 electrically conductive and lockable
Total / base weight	appr. 6,1 kg / 4,5 kg



construction time 2–3 min.



recommended accessories for Normal Care



Identification Case

for round tube Ø 25 mm

Material polycarbonate

H2K0625-

Basket with Clamp

for subsequent installation on round tube Ø 25 mm,
with 2 security screws

Material aluminium / coated

Size 250 x 90 x 200 mm (W x D x H)

Colour light grey

Z2S0663N

for further accessories see page 80 pp.

IV Poles and Furniture

create your individual IV-Pole under www.provita.de

Material / Colour	Castors	Base weight	Height adjustment	Bottle holder
I - N				
<ul style="list-style-type: none"> 1 stainless steel / blue 4 chromed steel / blue 	<ul style="list-style-type: none"> 1 twin castors Ø50 mm 2 mono castors 80 mm 	<ul style="list-style-type: none"> 1 non weighted (2,2 kg)* 2 weighted (4,5 kg) 	<ul style="list-style-type: none"> 1 single-handed safety 2 screw 	<ul style="list-style-type: none"> 1 plastic 2,0 kg / hook 2 stainless steel to screw in - 2,0 kg / hook 3 stainless steel to plug in - 2,0 kg / hook
Example I - N	4	1	2	2
				1

*Series I-N, without weighted base is only suitable for the use of gravity infusion

ECO-MOVE

I-S14212

+ comfortable movement and stumble-free maneuverability



pushing handle
available on
request




Material	stainless steel / aluminium
Colour of plastic parts	blue
Bottle holder	stainless steel 4 safety bottle hooks - 2,0 kg / hook
Height adjustment	single-handed safety height adjustment
Base size	appr. 630 x 620 mm
Castors	twin castors Ø 75 mm, according to DIN EN 60601 electrically conductive and lockable
Extra weight	integrated in base
Total / base weight	appr. 6,8 kg / 4,7 kg
Pushing handle	Z-ECO001 (optional accessory, not included in IV-stand)



! Please take note that not all accessories are suitable to be retro fitted. We would be happy to give advice.



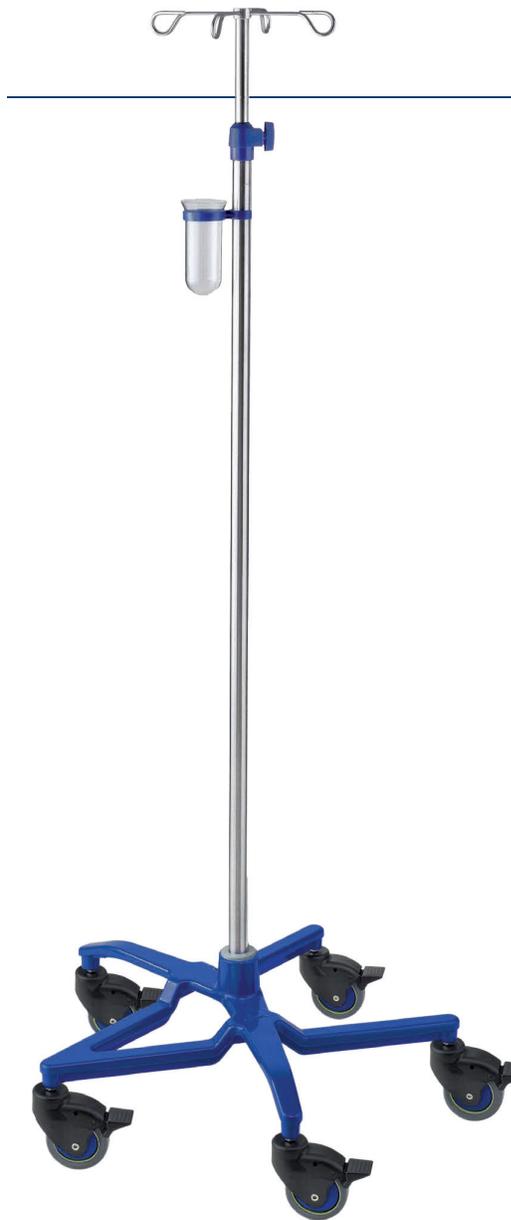

ECO-SPACE


+ saving of up to 60% space due to stackable base design

Material	chromed steel / stainless steel
Colour of plastic parts	blue
Bottle holder	stainless steel 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	screw height adjustment or single-handed height adjustment
Regulating range	appr. 1.350 mm – 2.150 mm
Tube diameter	Ø 25 / 18 mm
Length of outer tube	1.000 mm
Base diameter	590 mm
Castors	mono castors Ø 80 mm, according to DIN EN 60601 electrically conductive and lockable
Total / base weight	3,5 kg / 2,25 kg with drip vessel and holder
I-S12112	stainless steel, single-handed safety height adjustment
I-S42122	chromed steel, screw height adjustment



IV Poles and Furniture

space-saving




1,30 m²



630 x 621 mm

ECO-MOVE › space-saving storage 47,5 %

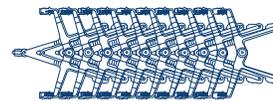

0,96 m²



Ø 580 mm



2,48 m²



Ø 635 mm

LOW-GRAVITY

I-L11112

+ IV-Pole with very low center of gravity for a safe transport

Material	chromed steel
Colour of plastic parts	light grey / black
Bottle holder	plastic 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	single-handed safety height adjustment
Regulating range	appr. 1.440 mm – 2.140 mm
Tube diameter	25 / 18 mm
Length of outer tube	1.200 mm
Base diameter	600 mm
Base centre piece	aluminium, massive
Base leg profile	flat-bar steel
Castors	twin castors Ø 75 mm, according to DIN EN 60601 electrically conductive and lockable
Total / base weight	7,6 kg / 6,0 kg



tilt resistant base construction



Night Line

I-NL1121

+ an assistance for the nursing staff during the night care

Material	chromed steel
Colour of plastic parts	black and fluorescent
Bottle holder	plastic 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	screw height adjustment
Regulating range	appr. 1.350 mm – 2.150 mm
Tube diameter	25 / 18 mm
Length of outer tube	1.000 mm
Base diameter	635 mm
Base leg profile	25 × 25 mm
Castors	twin castors Ø 50 mm, according to DIN EN 60601 electrically conductive and lockable
Total / base weight	3,9 kg / 1,9 kg



construction time 2–3 min.




glows in the dark



Intensive Care

IV Stand / Drip Stand

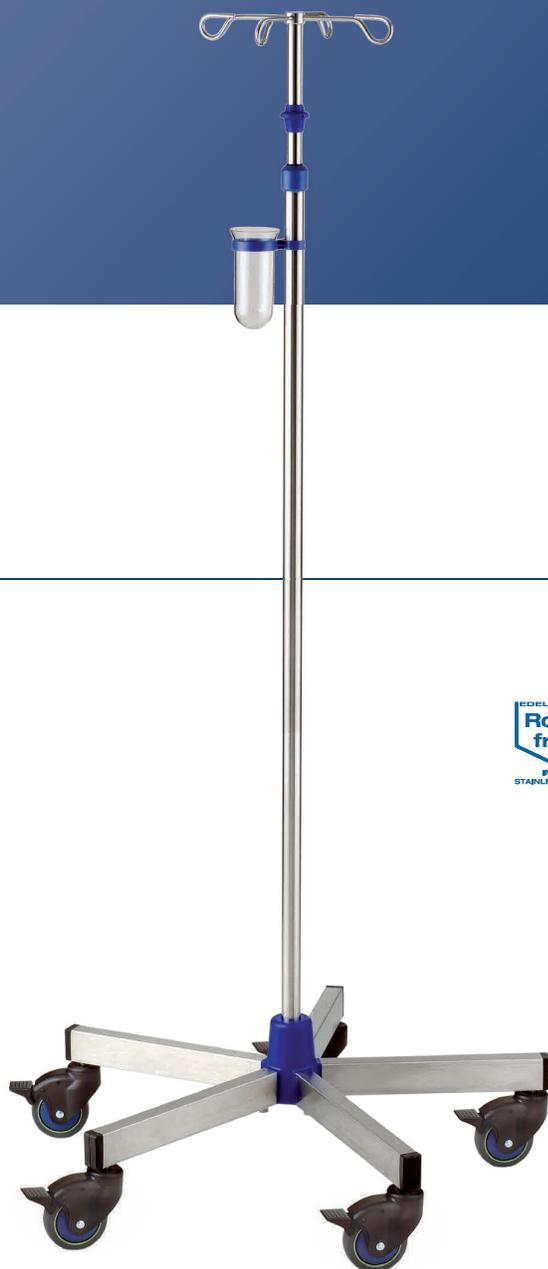

I-I12212


(our recommendation for use in ICU)

+ 1.200 mm outer pole height enables pumps to be fitted at a more comfortable height



Material	stainless steel
Colour of plastic parts	blue
Bottle holder	stainless steel 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	single-handed safety height adjustment
Regulating range	appr. 1.500 mm – 2.350 mm
Tube diameter	25 / 18 mm
Length of outer tube	1.200 mm
Base diameter	680 mm
Base leg profile	45 × 25 mm
Castors	mono castors Ø 80 mm, according to DIN EN 60601 electrically conductive and lockable
Total / base weight	appr. 8,6 kg / 6,5 kg with drip vessel and holder



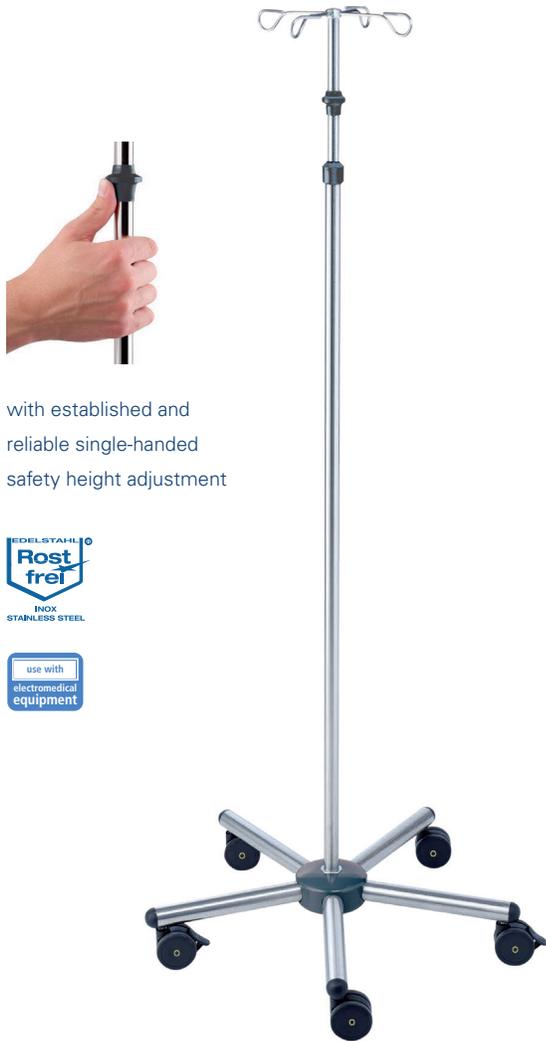

with established and reliable single-handed safety height adjustment



! we would like to make clear to you that the tilt-safety of the drip stands cannot be guaranteed with an outer tube length of 1.200 mm without the extra weighted base construction.

IMPORTANT: please pay attention to the advice regarding the mounting of our accessories – on page 84

Premium Care

+ very high load capacity

+ easy to clean and disinfect

Material	stainless steel / aluminium
Colour of plastic parts	grey
Bottle holder	stainless steel 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	single-handed safety height adjustment
Regulating range	appr. 1.500 mm – 2.300 mm
Tube diameter	25 / 18 mm
Length of outer tube	1.200 mm
Base diameter	630 mm
Castors	twin castors Ø 75 mm, according to DIN EN 60601 electrically conductive and lockable

I-PRE001

Base leg profile	Ø 33,7 mm
Total load capacity	18,0 kg (2,0 kg per hook / 10,0 kg outer tube)
Total / base weight	appr. 11,0 kg / 8,9 kg, with weighted base

I-PRE002

Base leg profile	Ø 25 mm
Total load capacity	13,0 kg (2,0 kg per hook / 5,0 kg outer tube)
Total / base weight	appr. 7,0 kg / 4,9 kg, with weighted base

I-PRE004

Base leg profile	Ø 33,7 mm
Total load capacity	13,0 kg (2,0 kg per hook / 5,0 kg outer tube)
Total / base weight	appr. 7,0 kg / 4,7 kg, non weighted base



soft drop prevents sudden movement upon release

I-PRE003

Material	stainless steel / aluminium
Bottle holder	stainless steel 4 safety bottle hooks – 5,0 kg / hook
Height adjustment	stainless steel screw height adjustment with soft-drop system
Regulating range	appr. 1.430 mm – 2.260 mm
Tube diameter	33,7 / 25 mm
Wall thickness inner tube	1,5 mm
Wall thickness outer tube	1,6 mm
Length of outer tube	1.200 mm
Base diameter	630 mm
Base leg profile	Ø 33,7 mm
Total load capacity	32,0 kg (5,0 kg per hook / 12,0 kg outer tube)
Total / base weight	appr. 12,0 kg / 8,9 kg, with weighted base



recommended accessories for Premium Care

for retro fitting to round tube Ø 25 – 33,7 mm (colour: grey)

Pushing Handle with quick-hand-fastener

Material stainless steel / aluminium

Z-PRE006

Shelf with quick-hand-fastener

Material stainless steel / aluminium

Z-PRE003

Stainless Steel Basket with quick-hand-fastener

Material stainless steel / aluminium

Z-PRE005

Drainage Holder 2 Hooks with quick-hand-fastener


Material stainless steel / aluminium

Z-PRE001




for further premium accessories see
page 80 pp.

! Please take note that not all accessories are suitable to be retro fitted. We would be happy to give advice.



high safety due to integrated soft-drop-system

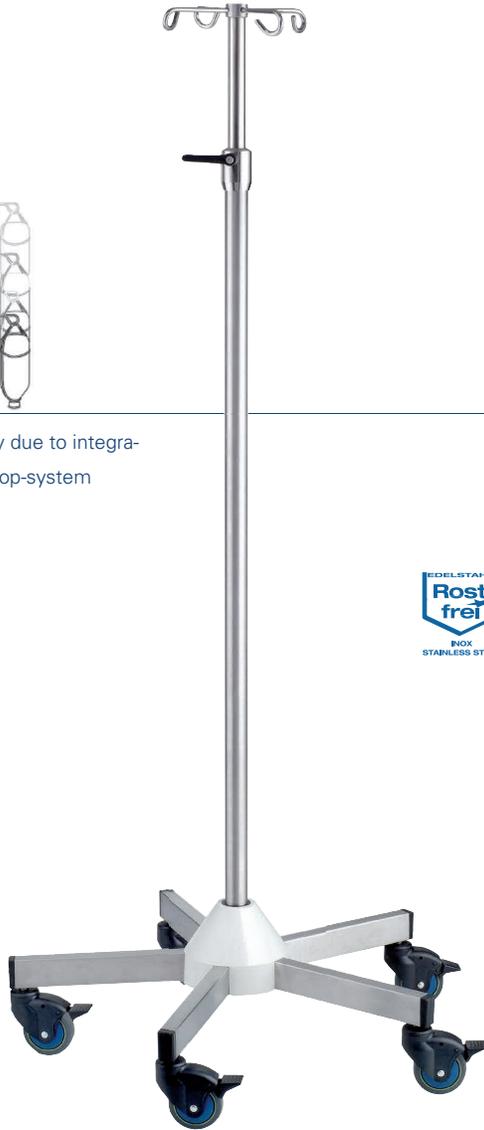

Heavy Duty Drip Stands and Device Trolleys

Model Duesseldorf University

I-D02124

+ strengthened bottle holder enables a hanging capacity of irrigation liquids of up to 5 liters



Material	stainless steel / aluminium
Bottle holder	stainless steel 4 safety bottle hooks – 5,0 kg / hook
Height adjustment	stainless steel screw height adjustment with »soft-drop system«
Regulating range	appr. 1.490 mm – 2.250 mm
Tube diameter	33,7 / 25 mm
Wall thickness inner tube	1,5 mm
Wall thickness outer tube	1,6 mm
Length of outer tube	1.300 mm
Base diameter	680 mm
Base leg profile	45 × 25 mm
Castors	mono castors Ø 80 mm, according to DIN EN 60601 electrically conductive and lockable
Total / base weight	appr. 10,0 kg / 6,6 kg



create your individual IV-Pole under www.provita.de

	Material	Castors	Base weight	Height adjustment	Bottle holder
I-D	0		1	2	
	0	2 3	1	2	3 4
	stainless steel	mono castors 80 mm apparatus castors 75 mm	non weighted	screw	stainless steel to plug in – 2,0 kg / hook stainless steel to screw in – 5,0 kg / hook
Example: I-D	0	2	1	2	4

ISP Units

I-P02226 (Basic Version)

+ high security through a turn safety pole construction

Material	stainless steel / aluminium
Bottle bar	stainless steel 6 safety bottle hooks – 2,0 kg / hook
Height adjustment	screw height adjustment (non rotating)
Regulating range	appr. 1.690 mm – 2.200 mm
Tube diameter	Ø 38 mm / Ø 25 mm
Length of outer tube	1.420 mm
Base diameter	860 mm
Base leg profile	45 × 25 mm
Castors	twin castors Ø 125 mm, according to DIN EN 60601 electrically conductive and lockable
Total weight (net weight)	appr. 25,0 kg
Load capacity	max. 50,0 kg



! These units will come with longer base legs



I-PA2226 recommendation 1
with 5 medical rails



I-PB2226 recommendation 2
with system for pump
attachment

optional

Load capacity	max. 25,0 kg
Castors	mono castors Ø 80 mm, according to DIN EN 60601 electrically conductive and lockable

I-P02227	Basic Version
I-PA2227	with 5 medical rails
I-PB2227	with system for pump attach- ment

OR

IV Stand / Drip Stand



I-023232

+ complete unit made of rust-free materials



Material	stainless steel
Bottle holder	stainless steel 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	stainless steel screw height adjustment with soft drop system
Regulating range	appr. 1.500 mm – 2.250 mm
Tube diameter	33,7 / 25 mm
Length of outer tube	1.200 mm
Base diameter	635 mm
Base leg profile	45 × 25 mm
Castors	twin castors Ø 75 mm, according to DIN EN 60601 electrically conductive and lockable
Total / base weight	appr. 14,3 kg / 11,0 kg



I-012112

(our recommendation for use in OR)



+ seamless welded caster-base - hygiene friendly through easy cleaning

Material	stainless steel
Colour of plastic parts	blue
Bottle holder	stainless steel 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	single-handed safety height adjustment
Regulating range	appr. 1.350 mm – 2.150 mm
Tube diameter	25 / 18 mm
Length of outer tube	1.000 mm
Base diameter	635 mm
Base leg profile	30 x 15 mm
Castors	mono castors Ø 80 mm, according to DIN EN 60601 electrically conductive and lockable
Total / base weight	appr. 3,6 kg / 1,9 kg with drip vessel and holder



IV Poles and Furniture

create your individual IV-Pole under www.provita.de

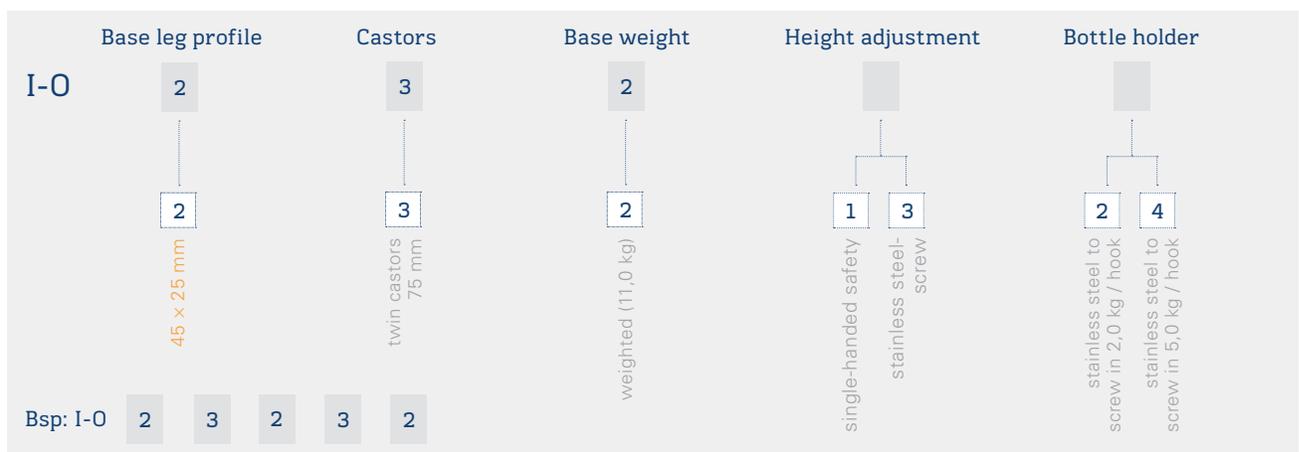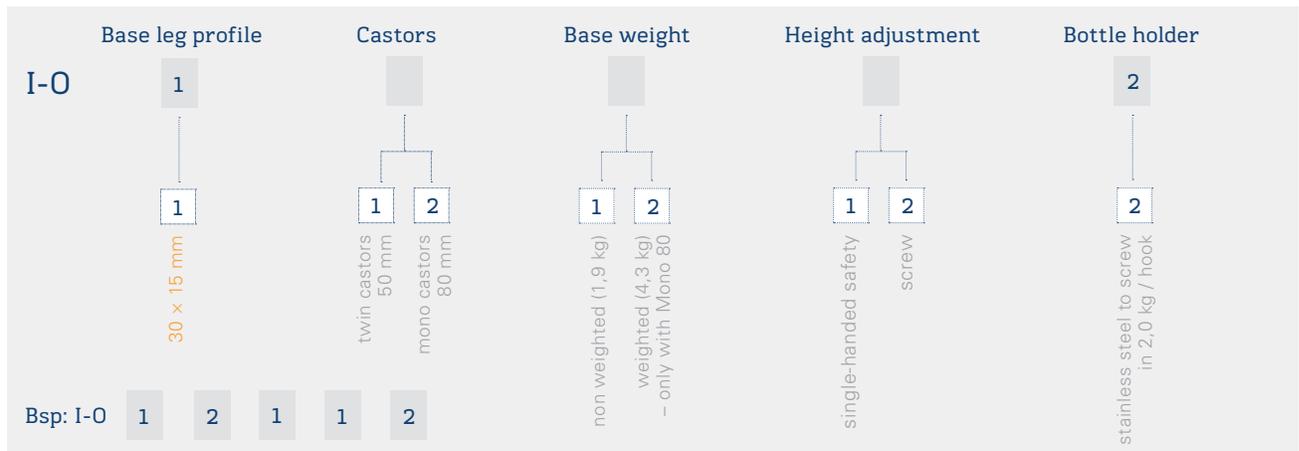



Video cart „provi-View“

I-VIEW01



- + undisturbed operation and illuminated area
- + uncomplicated live transmission of surgeries – for teaching purposes and operating education
- + enables, if necessary, co-operative surgeries with long-distance specialists



Material IV-Pole	stainless steel
Height adjustment	single-handed safety height adjustment
Regulating range	appr. 1.475 – 1.725 mm
Flexible arm for camera	with universal holder
Monitor holder	with VESA mounting plate
Supporting plate	350 x 540 with drawer
Plugboard	4-plug, medical with cover and central switch
Cable reels	on the backside of the plugboard
Monitor and camera	optional available
Base middle part	aluminium, nickle-plated
Base leg profile	Ø 33,7 mm
Base diameter	appr. 630 mm
Castors	twin castors Ø 75 mm, according to DIN EN 60601 electrically conductive and lockable



for OR video transmission

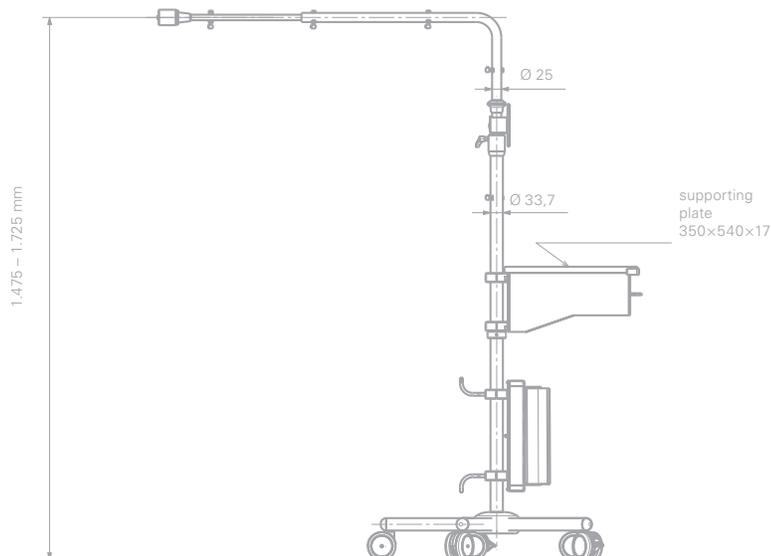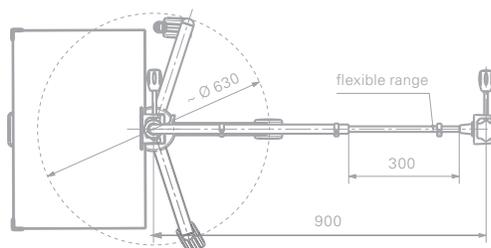



IV Poles and Furniture

MRI

IV Stand / Drip Stand



patented sealing cap prevents liquids from entering



I-M12121

(our recommendation for MRI use)

- + with magnetic-resonance test certificate (for MRI's of up to 1.5 Tesla)
- ! minimum distance of 30 cm to the MRI unit (MRI conditional)

Material	stainless steel
Colour of plastic parts	blue
Bottle holder	plastic 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	screw height adjustment
Regulating range	appr. 1.350 mm – 2.150 mm
Tube diameter	25 / 18 mm
Length of outer tube	1.000 mm
Base diameter	635 mm
Base leg profile	30 × 15 mm
Castors	mono castors Ø 80 mm, according to DIN EN 60601 electrically conductive and lockable
Total / base weight	appr. 3,6 kg / 1,9 kg with drip vessel and holder
MRI suitability	1,5 Tesla



IV Stand / Drip Stand

I-M91121



+ with magnetic-resonance test certificate (for MRI's of up to 3 Tesla)



! minimum distance of 30 cm to the MRI unit (MRI conditional)

Material	aluminium
Colour of plastic parts	dark grey
Bottle holder	plastic 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	screw height adjustment
Base diameter	635 mm
Castors	twin castors Ø 50 mm, according to DIN EN 60601 electrically conductive and lockable, with non-magnetic brass castor adapters
Total / base weight	appr. 2,0 kg / 1,4 kg
MRI suitability	3,0 Tesla

IV Poles and Furniture



construction time 2–3 min.




create your individual IV-Pole under www.provita.de

	Material / Colour	Castors	Base weight	Height adjustment	Bottle holder
I-M	1	1	1	2	1
	1	1 2	1	2	1
	stainless steel / blue	twin castors 50 mm mono castors 80 mm	non weighted	screw	plastic 2,0 kg / hook
Example: I-M	1	2	1	2	1

Urology

IV Stand / Drip Stand

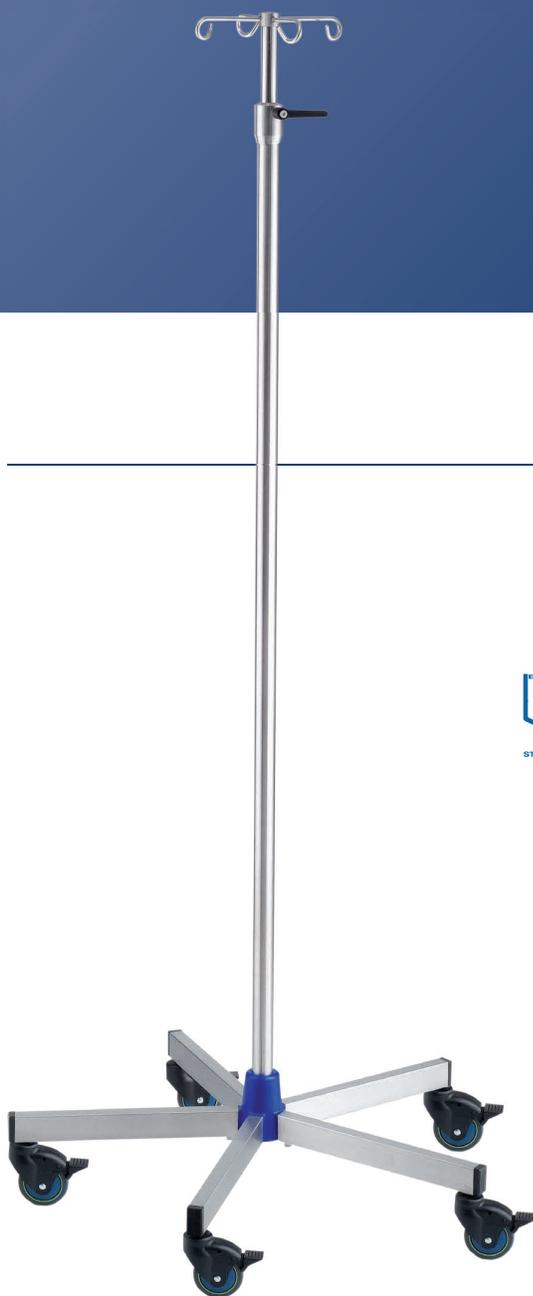

I-U02224

- + strengthened bottle holder enables a hanging capacity of irrigation liquids of up to 5 liters
- + higher build up pressure of irrigation liquids through extended length 2.800 mm



Material	stainless steel
Bottle holder	stainless steel 4 safety bottle hooks – 5,0 kg / hook
Height adjustment	stainless steel screw height adjustment with soft-drop system (see page 63)
Regulating range	appr. 1.900 mm – 2.800 mm
Tube diameter	33,7 / 25 mm
Length of outer tube	1.600 mm
Base diameter	800 mm
Base leg profile	45 × 25 mm
Castors	mono castors Ø 80 mm, according to DIN EN 60601 electrically conductive and lockable
Total / base weight	appr. 13,2 kg / 7,5 kg





I-U02237

Lifter with battery driven electrical height adjustment


- + urology pole easy to adjust by using the foot-switch
- + mobile use due to high battery capacity
- + high security through a turn safety pole construction

Material	stainless steel
Base plate	steel, galvanized, white coated
Bottle holder	stainless steel 3 safety bottle hooks – 10,0 kg / hook
Center tube / Inner tube	Ø 38 mm / Ø 25 mm
Regulating range	appr. 1.500 mm – 2.650 mm
Base	appr. 550 × 550 mm
Operated	by foot switch
Maximum load capacity	30,0 kg
Operation time	appr. 22 s (appr. 52 mm/s)
Protection class	II
Safety class	IP 20
Castors	apparatus castors Ø 75 mm, according to DIN EN 60601 electrically conductive and lockable
Total weight (net weight)	36,5 kg
Features	with battery charger (due to battery operation no need of disruptive power cable), with bumper wheels



Paediatric

IV Stand / Drip Stand

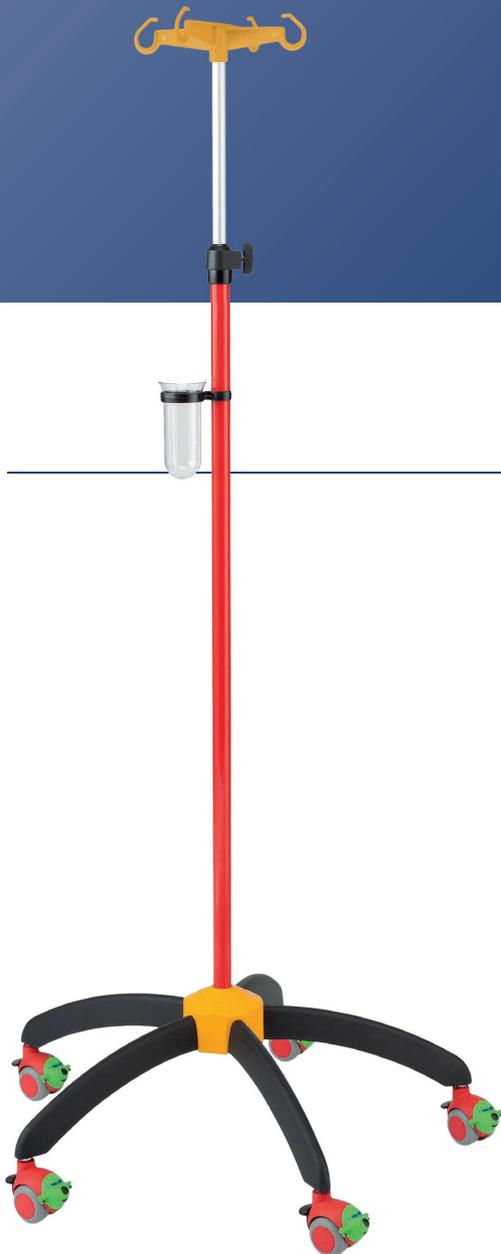

Children IV Pole » Rainbow «

I-HA4125

+ colourful combinations enhance the hospital environment and encourage patient rehabilitation

Material	aluminium / plastic
Colour of plastic parts	coloured
Bottle holder	plastic 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	screw height adjustment
Regulating range	appr. 1.350 – 2.000 mm
Tube diameter	25 / 18 mm
Base diameter	635 mm
Castors	twin castors Ø 50 mm with figures
Total / base weight	appr. 3,0 kg / 1,6 kg

I-HA4125 red, black, yellow – with airplane castors

I-HA4126 green, black, yellow – with mouse castors

I-HA4130 yellow, blue, green – with airplane castors



construction time 2–3 min.





IV Poles and Furniture



I-HA4130



I-HA4126



L111120K


+ available with mouse- or plane shaped castors in several colored layouts

Children lamp see page 26



Homecare

IV Stand / Drip Stand

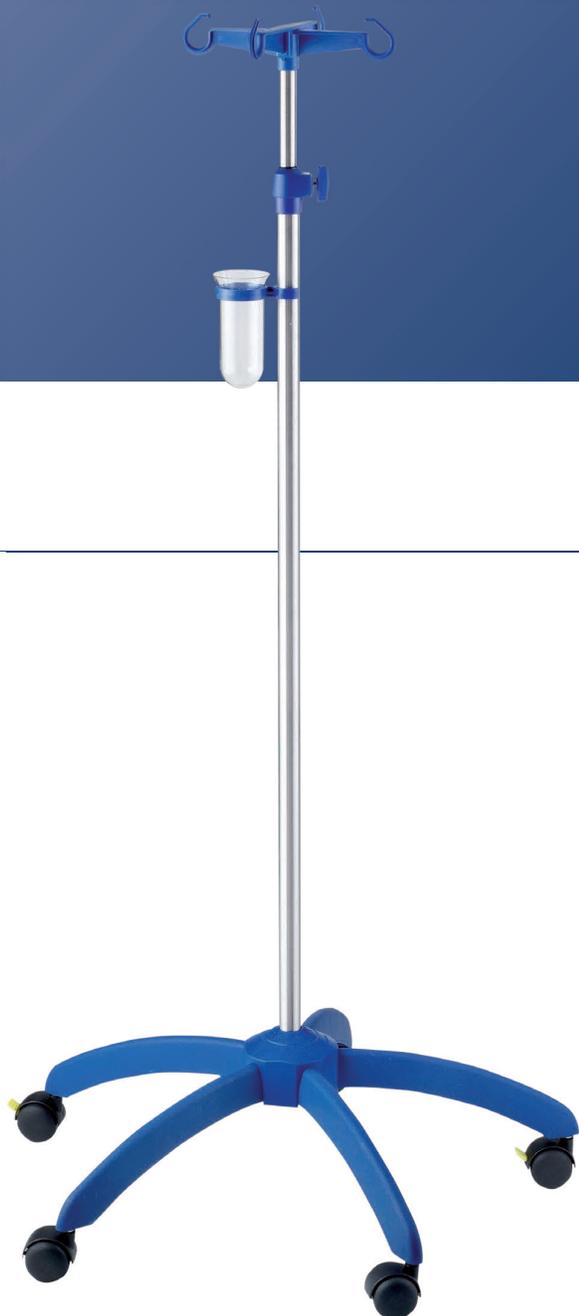

I-H71121

(our recommendation for use at home)

+ very easy and fast assembly through a plug in and out system with only 1 screw connection

Material	aluminium
Colour of plastic parts	blue
Bottle holder	plastic 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	screw height adjustment
Regulating range	appr. 1.350 mm – 2.150 mm
Tube diameter	25 / 18 mm
Base diameter	635 mm
Castors	twin castors Ø 50 mm, according to DIN EN 60601 electrically conductive and lockable
Total / base weight	appr. 3,0 kg / 1,6 kg with drip vessel and holder



construction time 2–3 min.



DIN EN 60601
3rd Edition Clause
9.4.2.1 | 9.4.2.2



create your individual IV stand under www.provita.de



Foldable IV-Pole

(our recommendation for mobile use)
I-H84132

+ easy and quick to use in emergency and home care


Material	aluminium / plastic
Bottle holder	2 bottle hooks – 0,5 kg / hook
Height adjustment	screw height adjustment
Regulating range	appr. 830 – 1.780 mm
Tube diameter	20 / 15 / 11 mm
Transport size	750 x 100 x 100 mm
Base diameter	680 mm
Total load capacity	1,0 kg
Total weight (net weight)	appr. 2,0 kg
Features	anti-slide stopper base, including carrying bag



size of bag:
appr. 750 x 100 x 100 mm



IV Poles and Furniture

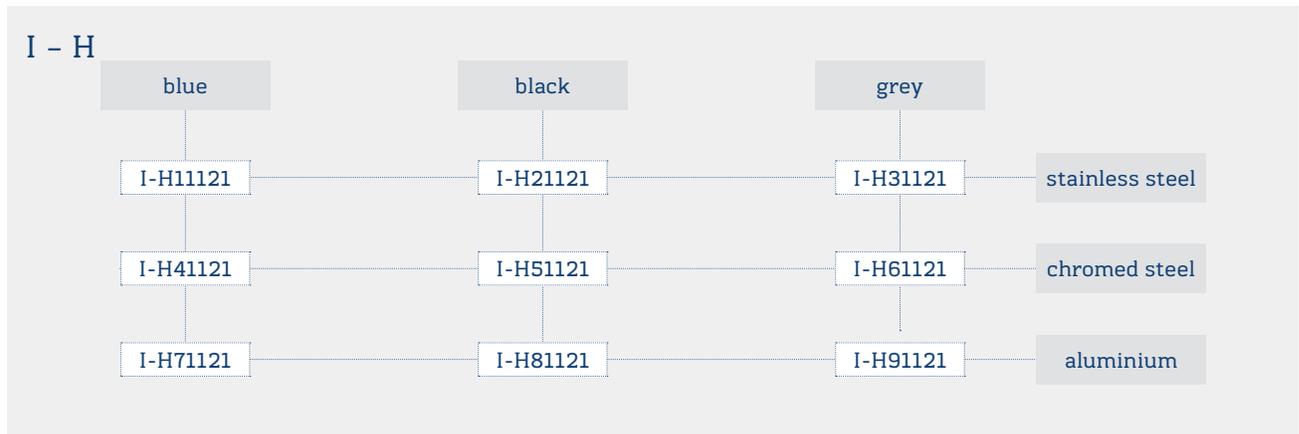

*Series I-H is only suitable for the use of gravity infusion

Infuboy

IV-backpack



INFUBOY

I-WALK01

- + movement creates independence
- + movement enhances the well-being
- + movement strengthens health

IV-pole material	stainless steel
Fabric	100 % polyester
Height adjustment	stainless steel screw height adjustment
Regulating range	appr. 700–850 mm
Hooks	2 pieces, 2,0 kg/hook
Size	appr. 350 × 795 mm
Weight	appr. 1,6 kg

Your product advantages to your benefit

application

- + patient is able to move freely on slopes – even with infusion
- + the patient with its both hands free can hold himself onto a railing
- + light materials grant high wearing comfort
- + easy to clean plastic frame due to reduced adhesion of dirt

technology

- + bag (frame) made of high-quality plastic
- + comfortable screw height adjustment

safety

- + plastic frame without toxic ingredients
- + no risk of injury thanks to hooks that automatically fold

economy

- + washable bag (fabric) up to 60°
- + complete recyclability



hooks folded



Accessories

IV Stand / Drip Stand



Bottle Holder

4 safety bottle hooks M6, for IV-Poles with inner nut M10, threaded spigot M10 to screw in

Capacity	2,0 kg per hook
Weight	appr. 0,15 kg

Z2N06352	stainless steel
Z2S06367	chromed steel



Bottle Holder

4 safety bottle hooks, for IV-Poles without inner nut, for round tube Ø 18 mm

Capacity	2,0 kg per hook
Material	plastic
Weight	appr. 0,6 kg

Z2K0645 -	G › green / D › blue / H › red / N › grey / R › black
-----------	--



Plug-In Bottle Holder

4 safety bottle hooks for IV-Poles without inner nut, for round tube Ø 18 mm

Capacity	2,0 kg per hook
Material	stainless steel
Weight	appr. 0,15 kg

Z2N06392



Bottle holder for 5 l bottles

4 safety bottle hooks M8, for IV-poles with inner nut M10, threaded spigot M10 to screw in

Capacity	5,0 kg per hook
Material	stainless steel
Weight	appr. 0,2 kg

Z2N06102



Bottle bar

safety bottle hooks M6, for IV-Poles with inner nut M10, threaded spigot M10 to screw in

Capacity	2,0 kg per hook
Material	stainless steel

Z2N06552	4 safety bottle hooks, length 500 mm
Z2N06542	6 safety bottle hooks, length 600 mm



Pushing Handle*

for round tube Ø 25 mm, height adjustable through two fixing screws

Material	stainless steel
Weight	appr. 550 gr

Z2N07982




Pushing handle, foldable*

for round tube Ø 25 mm

Material	stainless steel
Colour of mounting bracket	blue
Weight	appr. 0,9 kg

Z2N07952



Pushing handle for ECO-MOVE*

for round tube Ø 25 mm

Material	stainless steel / aluminium
Colour of clamp	blue
Safety rubber	on handle

Z-ECO001



Infusion Bottle Holder

2 bottle baskets and 2 bottle hooks, for IV-Poles with and without inner nut, for round tube Ø 18 mm

Capacity	2,0 kg per basket / hook
Weight	appr. 0,4 kg

Z2N65632	to screw in, stainless steel (safety bottle hooks)
Z2S65837	to plug in, chromed steel (safety bottle hooks and baskets)
Z2S65737	to screw in, chromed steel (safety bottle hooks and baskets)



Pushing Handle*

for round tube Ø 25 mm, height adjustable by handwheel

Material	stainless steel
Colour of plastic parts	black
Weight	appr. 0,4 kg

Z2N06982



Pushing Handle*

for round tube Ø 38 mm

Material	aluminium
Colour	white
Size	290 × 380 mm
Weight	appr. 1,1 kg

Z2N09343



Pushing handle with quick-hand-fastener*

for round tube Ø 25 mm, height adjustable by handwheel

Material	plastic
Colour	black

Z2K0698R

! *Attention: Use of pushing handles is not allowed with IV-stands I-N and I-H.



Shelf Rectangular Shape*

for round tube Ø 25 mm, height adjustable by handwheel, with circumferential safety edge

Material	aluminium / stainless steel
Size	315 × 275 mm
Weight	appr. 2,75 kg

Z2N63422



Shelf round*

for round tube Ø 25 mm, with circumferential safety edge

Material	stainless steel
Diameter	370 mm
Weight	appr. 2,9 kg

Z2N64422



Monitor Shelf*

for round tube Ø 25 mm, height adjustable by handwheel, with lateral safety edge

Material	steel, white coated / aluminium
Size	240 × 248 mm
Weight	appr. 2,75 kg

K2S7043A



Identification Case

for round tube Ø 25 mm, labelling of the IV-Pole for easy station or room allocation

Material	polycarbonate
Weight	appr. 0,1 kg

H2K0625-



Double wall rail

for round tube Ø 25 mm

Material	aluminium / stainless steel
Weight	appr. 1,3 kg
optional	for round tube Ø 33,7 mm / Ø 38 mm

Z2N06932



Compact Rail (split)

for round tube Ø 38 mm

Material	aluminium
Medical rail	25 × 10 mm, surrounding
Capacity	30,0 kg
Size	110 × 110 mm
Weight	appr. 0,9 kg

Z2N09303



! *Please take note that not all accessories are suitable to be retro fitted. We would be happy to give advice.



Medical Approved Plugboard vari med

+ with children protection (higher touch protection of plug board)

Material of housing	aluminium, anodized
In accordance with norm	DIN EN 60601-1-1
Operating indicator	green
Safe-guard	dual fused T6, 3AH
Safety cover	automatically locked, opening with tool only
Cable supply	3 m (spirale cable 1–3 m), antibacterial with medical plug
Cable size	1,5 mm ² / 2,5 mm ²
Traceability	by production date on cable and plug
Number of sockets	4 or 6-plug, 90° turned with enough space in between
Attachment	universal bracket for medical rail and round tubes
optional	antibacterial supply cable / plug

for mobile use (cable size 1,5 mm²)

Z2K06384	4-plug
Z2K07014	4-plug, dual fused
Z2K07024	4-plug, spirale cable
Z2K07034	4-plug, spirale cable, dual fused
Z2K06394	6-plug
Z2K07114	6-plug, dual fused, 5 m cable supply
Z2K07124	6-plug, dual fused, 3 m cable supply

for mobile use (cable size 1,5 mm²)

with connection option for potential equalization

Z2K07064	4-plug, dual fused, 1,5 m, 4 × PE-connections, PE-connection lead: 4 mm ² , 4 m
Z2K07074	4-plug, dual fused, 3 m, 4 × PE-connections, PE-connection lead: 4 mm ² , 4 m
Z2K07084	4-plug, dual fused, 5 m, 4 × PE-connections, PE-connection lead: 4 mm ² , 4 m
Z2K07094	4-plug, dual fused, spirale cable 1–3 m, 4 × PE-connections, PE-connection lead: 4 mm ² , 4 m

for medical installations (cable size 2,5 mm²)

Z2K07044	4-plug
Z2K07054	4-plug, dual fused

for medical installations (cable size 2,5 mm²)

with connection option for potential equalization

Z2K07104	4-plug, dual fused, 2,5 mm ² , 1,5 m, 4 × PE-connections, PE-connection lead: 4 mm ² , 4 m
----------	--






Pump Holder for 2 Devices

for round tube Ø 25 mm, height adjustable by handwheel, to adapt infusion pumps or other devices

Material	stainless steel
Weight	appr. 1,0 kg

Z2N06312

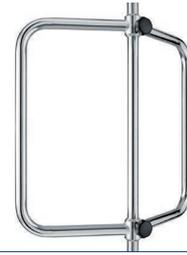

Pump Holder for 4 Devices

for round tube Ø 25 mm, height adjustable by two handwheels, to adapt infusion pumps or other devices

Material	stainless steel
Weight	appr. 1,2 kg

Z2N06292



Wall Rail

for subsequent adaption on round tube Ø 25 / 38 mm, height adjustable through two fixing screws

Material	stainless steel
Profile	25 × 10 mm
Length	558 mm
Load capacity	appr. 8,0 kg
Weight	appr. 0,9 kg

H2N70432	for round tube Ø 25 mm
H2N70332	for round tube Ø 38 mm



Wall Mount

for direct mounting of poles to walls, with 4 mounting holes

Material	aluminium, white coated
Socket	Ø 18 mm
Size	appr. 60 × 60 × 70 mm

Z2N0617A with headless screw

! Instructions for installation please see p. 192



Bracket for Fixation at Tubes

for mounting of accessories to IV-Poles, Ø 25 - 50 mm

Material	aluminium, coated
Mounting	Ø 18 mm
Weight	appr. 0,13 kg

Z2N0502A	white
Z2N0502S	silver

IMPORTANT: We expressly point out that not all bottles Cross/ Beam variants / accessories for products are without extra weight construction. For safety reasons, you should take the opportunity and let yourself be advised by our sales team about the "tilting" requirements of the norm DIN EN 60601. Another point we would be happy to advise you on will be, how one can jeopardize the approval of the DIN EN 60601 by changes on products.

Accessory with quick-hand-fastener

to adapt onto round tubes \varnothing 25 - 33,7 mm
(colour of handle: grey)



Drainage Holder 2 Hooks

Material	stainless steel / aluminium
Distance of hooks	160 mm
Capacity	2,0 kg / hook
Weight	appr. 0,5 kg

Z-PRE001



Pushing Handle*

Material	stainless steel / aluminium
Weight	appr. 0,55 kg

Z-PRE006



Pump Holder for 2 Devices

Material	stainless steel / aluminium
Capacity	5,0 kg (ea. 2,5 kg per side)
Weight	appr. 0,95 kg

Z-PRE002



Medical Rail

Material	stainless steel / aluminium
Size	25 x 10 x 500 mm
Capacity	5,0 kg (ea. 2,5 kg per side)
Weight	appr. 0,7 kg

Z-PRE004



Shelf

Material	stainless steel / aluminium
Size	310 x 250 mm
Weight	appr. 1,6 kg

Z-PRE003



Basket

Material	stainless steel / aluminium
Size	300 x 200 x 100 mm
Weight	appr. 0,5 kg

Z-PRE005



Coat Holder with 2 Hooks

Material	stainless steel / aluminium
Total length	460 mm
Capacity	1,0 kg / hook
Weight	appr. 0,7 kg

Z2N6661S

! *Attention: Use of pushing handles is not allowed with IV-stands I-N and I-H.

IV-Poles

IV Stand / Drip Stand



Wall IV-Poles

Material	stainless steel / aluminium
Bottle holder	stainless steel 4 / 3 safety bottle hooks – 2,0 kg / hook
Height adjustment	screw height adjustment
Regulating range	appr. 730 – 1.040 mm / appr. 540 – 790 mm
Tube diameter	25 / 18 mm
Inner tube	2 × 90° bend / straight
Working radius	200 mm
Wall holder	2 pieces with 2 mounting holes each for flat head screw M6 (screws are not included in the delivery)
Total weight (net weight)	appr. 2,0 kg with drip vessel and glass holder

I-WAND01	bended
I-WAND02	straight



Wall IV Holder

Material	stainless steel / aluminium
Tube diameter	18 mm, pivotable
Length of arm	400 mm
Bottle hook	adjustable – 2,0 kg / hook
Weight	appr. 0,8 kg

I-WAND03

! Instructions for installation please see p. 192

IV-Pole without attachment

Bottle holder	stainless steel 4 safety bottle hooks – 2,0 kg / hook
Height adjustment	single-handed safety height adjustment
Regulating range	appr. 1.070 mm – 1.660 mm
Tube diameter	25 / 18 mm
Weight	appr. 2,1 kg / appr. 1,6 kg

I1000702	without bracket, stainless steel
I1000707	without bracket, chromed steel



- + Enough safe distance in between both tubes once the pole reached its lowest height as a precaution of risk of injury (e.g. to avoid finger traps)

for beds



for inclinable tables and couches



with Plug-In

Ø 27 × L 180 mm, with adapter for secure insertion

I1000302	stainless steel
I1000307	chromed steel



IV-holder for bed lifting pole

Material	plastic
Colour	white
Fastening	to oval tube 32 mm
Bottle hooks	4 safety bottle hooks - 2,0 kg / hook

Z2K0646A

with Ball Joint Mount

with universal clamp for mounting to various rail profiles and round tubes, stepless inclinable up to 30° in all directions

I1000232	stainless steel with 2 safety bottle hooks (90°)
I1000252	stainless steel with 4 safety bottle hooks



IV-bottle holder for bed lifting pole

Material	stainless steel / aluminium
Fastening	to oval and round tube profiles
Bottle bar	4 safety bottle hooks – 2,0 kg / hook
Length of bottle bar	490 mm
Height adjustment	double clamp with hand wheel

Z2N09072

further adapters and OEM poles on request and on page 102